Scheda tecnica del sistema
System technical card

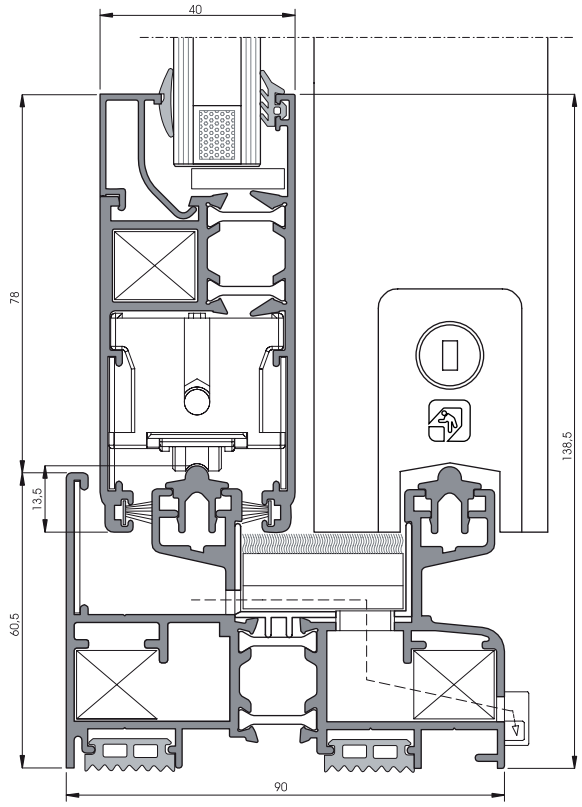

SCHEDA TECNICA DEL SISTEMA - *SYSTEM TECHNICAL CARD*

SERIE: SL 900TT

PROFILATI estrusi lega: 6060 (UNI 9006/1).
TOLLERANZE DIMENSIONALI E SPESSORI: UNI EN 12020-02
TAGLIO TERMICO: realizzato con due astine continue di poliammide rinforzata con fibra di vetro.
APPLICAZIONI VETRO: con fermavetro a taglio 45° squadrato o a taglio 90° arrotondato.
CAMERA PER VETRO: variabile secondo i profilati usati.
DIMENSIONE BASE DEL SISTEMA:
Telaio fisso: sez. 75,5 mm/142 mm.
Telaio mobile sezione 40 mm.
Accavallamento telaio/anta 13,5 mm.
IMPIEGO: il sistema permette la realizzazione di finestre scorrevoli.

SERIES: SL 900TT

***EXTRUDE PROFILES ALLOY**: 6060 (UNI 9006/1)*
***DIMENSIONAL TOLERANCES AND THICKNESS:** UNI EN 12020-02*
***THERMAL CUT:** carried out with two continuous polyamide rods with reinforced fiber glass.*
***GLASS APPLICATIONS:** with normal or rounded glass holder with cuts at 45 or 90 degrees.*
***GLASS CHAMBER:** variable according to the profiles used.*
BASIC DIMENSIONS OF THE SYSTEM:
Fixed frame sec. 75,5 mm/142 mm.
Mobile frame profile 40 mm.
Overlap between frame and wing 13,5 mm.
***USAGE:** the system allows the realization of sliding window.*

PRESTAZIONI DEL SISTEMA

Trasmittanza termica con vetro Ug = 1,0 (interc. caldo)	**Uw = 2,50 W/m²K**
Trasmittanza termica con vetro Ug = 1,0 (interc. caldo)	**Uw = 2,30 W/m²K**
Permeabilità all'aria (dim. 3300 x 2300 mm)	**CLASSE 4**
Tenuta all'acqua (dim. 3300 x 2300 mm)	**8A**
Resistenza al carico del vento (dim. 3300 x 2300 mm)	**B3**
Isolamento acustico (dim. 1230 x 1480 mm)	**37 dB**

Performances

Thermal Transmittance dim. 1540 x 1480 mm	**Uw = 2,50 W/m²K**
Thermal Transmittance dim. 1540 x 2180 mm	**Uw = 2,30 W/m²K**
Air permeability (dim. 3300 x 2300 mm)	**CLASS 4**
Waterthinghtness (dim. 3300 x 2300 mm)	**8A**
Resistance to wind load (dim. 3300 x 2300 mm)	**B3**
Soundproofing (dim. 1230 x 1480 mm)	**37 dB**